

Twist-Lock® Devices  
15A, 125V, 2 Pole, 3 Wire Grounding  
Insulgrip® Plug

Features

- Individually molded face for each blade configuration
- Roomy wiring chamber provides ample space for wiring
- Ribbed nylon housing provides a secure grip that's impact and chemical resistant

Ordering Information

| Description                                                   | Cord Diameter           | UPC          | Catalog Number |
|---------------------------------------------------------------|-------------------------|--------------|----------------|
| Insulgrip® plug, black and white nylon. Multiple drive screws | .230"- .720" (5.8-18.3) | 783585171159 | HBL4720C       |

Listings


|                              |
|------------------------------|
| Listed to UL 498             |
| Fed. Spec. W-C-596           |
| Certified to CSA C22.2 No.42 |

Specifications

|                      |                                              |
|----------------------|----------------------------------------------|
| Housing / Cord Clamp | Nylon                                        |
| Terminal Retainer    | Clear polycarbonate                          |
| Blades               | Brass                                        |
| Terminal Screws      | #8-32 Brass (Phillips / Slotted / Robertson) |
| Terminal Clamp       | Cold rolled steel – nickel plated            |
| Assembly Screws      | Steel - nickel plated                        |

Performance

|                         |                                                          |
|-------------------------|----------------------------------------------------------|
| <b>Electrical</b>       |                                                          |
| Current Interrupting    | Certified for current interrupting at full rated current |
| Dielectric Voltage      | Withstands 2,000V minimum                                |
| <b>Mechanical</b>       |                                                          |
| Terminal Accommodation  | #16 AWG - #8 AWG stranded copper wire only.              |
| Terminal Identification | Terminals identified in accordance with UL 498           |
| <b>Environmental</b>    |                                                          |
| Flammability            | HB or better per UL94 or CSA 22.2 No. 0.6                |
| Moisture Resistance     | IP20 Suitability                                         |
| Operating Temperatures  | Maximum Continuous 75°C Minimum -40°C (w/o impact)       |

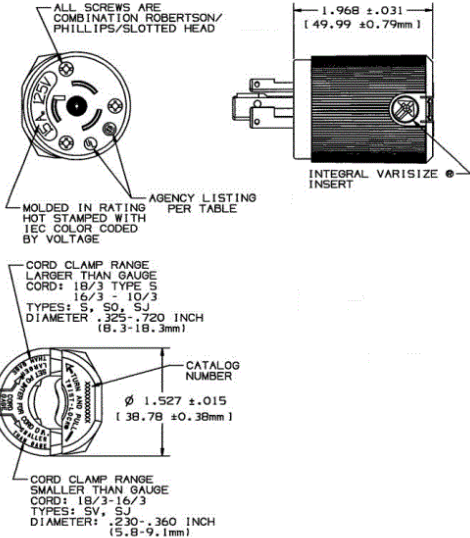

Accessories

|                    |          |
|--------------------|----------|
| Connector          | HBL4729C |
| Weatherproof Boot  | HBL6023  |
| Duplex Receptacle  | HBL4700  |
| Single Receptacle  | HBL4710  |
| Flanged Receptacle | HBL4715C |

Resources

|                      |
|----------------------|
| Customer Use Drawing |
| eCatalog             |